

09/30/99
10713 U.S. PTO

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

DOCKET NUMBER: AT 9-99-480
DATE: 9/30/99

106578 U.S. PTO
09/409376
09/30/99

Sir:

Transmitted herewith for filing is the Patent Application of:

Inventors: **Christopher Shane Claussen, and Matthew Dale McClain**
For: **A METHOD FOR DEVELOPING A CUSTOM TAGBEAN**

Enclosed are:

- ☒ Patent Specification and Declaration
- ☒ 7 sheets of drawing(s). (Informal)
- ☒ An assignment of the invention to International Business Machines Corporation (includes Recordation Form Cover Sheet).
- ☐ A certified copy of a _____ application.
- ☐ Information Disclosure Statement, PTO 1449 and copies of references.

The filing fee has been calculated as shown below:

For	Number Filed	Number Extra	Rate	Fee
Basic Fee				\$760.00
Total Claims	20-20	0	x \$18 =	0
Indep. Claims	5-3	2	x \$78 =	156.00
Multiple Dep.			x \$260 =	0
Claims Presented				
			TOTAL	\$916.00

- ☒ Please charge my Deposit Account No. 090447 in the amount of \$916.00. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account 090447. A duplicate copy of this sheet is enclosed.
 - ☒ Any additional filing fees required under 37 CFR 1.16.
 - ☒ Any patent application processing fees under 37 CFR 1.17.

Respectfully submitted,

By: Marilyn Smith Dawkins
Marilyn Smith Dawkins
Reg. No. 31,140
Intellectual Property Law Dept.
IBM Corporation
11400 Burnet Road, Zip 4054
Austin, Texas 78758
Telephone (512) 823-0094

A METHOD FOR DEVELOPING A CUSTOM TAGBEAN

This application contains subject matter protected by Copyright Law. All rights reserved.

BACKGROUND OF THE INVENTION

5 Technical Field

The present invention relates generally to Internet publishing technologies and, in particular, to techniques for dynamically serving web page content.

Description of the Related Art

60000 3260460

A Hypertext Markup Language (HTML) file uses a limited set of tags to
10 convey basic information about the structure of a web document, e.g., whether given text is a heading or a paragraph. With HTML, the style and logic of the document are hardcoded. HTML does not provide tags that define the meaning of the page element. To address this limitation, web content is now being authored in eXtensible Markup Language (XML), which provides a way for an author to create a custom markup
15 language to suit a particular kind of document. In XML, each document is an object, and each element of the document is an object. The logical structure of the document typically is specified in a Document Type Definition (DTD). A DTD may be used by the author to define a grammar for a set of tags for the document so that a given application may validate the proper use of the tags. A DTD comprises a set of
20 elements and their attributes, as well as a specification of the relationship of each element to other elements. Once an element is defined, it may then be associated with a stylesheet, a script, HTML code or the like. Thus, with XML, an author may define his or her own tags and attributes to identify structural elements of a document, which

may then be validated automatically. An XML document's internal data structure representation is a Document Object Model (DOM). The DOM makes it possible to address a given XML page element as a programmable object. It is basically a tree of all the nodes in an XML file.

5 Page serving technologies are evolving at a rapid pace. Since 1997, three new major technologies have attempted to supplement, if not replace, dynamically generated HTML, i.e. database or CGI scripts used to generate a web page on the fly. These technologies are Microsoft's active server page (ASP), Sun Microsystems's Java server page (JSP), and the Extensible Style Sheet Language (XSL/XSLT) being
10 promoted by the World Wide Web Consortium (W3C). They provide for the generation and serving of dynamic web page content by enabling a page creator to write HTML and then to embed pure programming logic inside the page markup. Microsoft's ASP and Sun's JSP are very similar in that they both are essentially web templates that enable given code (e.g., code written in Java) to be embedded in static
15 HTML to be served in response to a client browser request. In an illustrative example, a server (and, in particular, a Java runtime servlet) responds to a client .jsp request as follows: the servlet retrieves a flat file corresponding to the requested page, translates that file into a Java servlet, compiles the servlet, class loads the servlet, and then invokes the servlet to cause given (e.g., customized) web content to
20 be returned to the requesting browser. XSL/XSLT, to the contrary, is rooted in formatting and manipulating XML. XSLT, in particular, provides extensible mechanisms for defining templates to manipulate XML of any custom DTD.

The existing techniques for serving dynamic content have various limitations.

Conventional server-side scripting on a web page can be complicated and, therefore, such scripting is usually difficult to maintain and evolve. Further, with existing technologies, typically only a single scripting language is allowed on a web page. This limitation is acceptable, so long as only one author is responsible for editing the

5 page, or if all of the responsible authors know and use the same scripting language and the language of choice is supported by the web server. Microsoft's ASP technology supports multiple scripting languages, but only one language may be used on a page. Moreover, multiple languages cannot be embedded in one another, and their order of execution is undefined. Further, page-serving technologies such as ASP

10 and JSP are not XML-compliant, and neither ASP nor JSP provides an extension mechanism to allow authors to add custom tags.

It is also known in the art to provide a web page author with a library of preexisting custom tags. An illustrative product of this type is Cold Fusion, which is HTML-centric. This product, however, does not afford the author the ability to create

15 custom tags. Macromedia's Dreamweaver product has a tag construction mechanism, but this product does not allow for the embedding of custom tags, nor does it allow the document to be reorganized by the tags. It also keeps the script code on the page. In particular, the script is hidden from the user, but it is still present on the page, and it may be viewed and/or edited from within another editor. However, the

20 modifications made in another tool are not maintained. Microsoft provides a similar technology, called design-time control (DTC), that hides code from the user but still maintains the code on the page. DTC is not XML-compliant and it does not allow DTCs to be embedded within one another. Nor does the DTC mechanism allow the

document to be reorganized . In addition, the DTC syntax is quite cumbersome for the page author. Moreover, while other DTC-aware tools will hide the script code correctly, basic text-editors can still edit the code, and the changes made will not be importable back into the DTC-aware tools. DTC also does not provide access to the

- 5 Document Object Model. Other products or technologies that have custom tag extensions include HeiTML and Meta-HTML. Essentially, these are tag macro definition languages for HTML. Such languages, however, are not XML compliant.

There remains a need in the art to provide new techniques for publishing Internet content that can fully leverage the manipulation and template mechanism of

10 XSLT with the scripting capability of the JSP/ASP model. The present invention addresses this need.

BRIEF SUMMARY OF THE INVENTION

It is an object of the present invention to simplify the development, testing and maintenance of code objects that are used, for example, to generate dynamic web

15 pages.

It is another object of this invention to provide a method for serving web page content using a code object that is written and stored apart from page generating executable code (e.g., a Java servlet) otherwise created when the page is initially translated at a server.

20 A still further object of the present invention is to locate code for handling a given task in a given place, preferably in a single method, that resides externally to the executable code used to generate a web page dynamically at request time at a server.

Yet another object of the invention is to enable a developer to write and locate

code for handling a given task separate and apart from page generating servlet code so that the servlet code may be separately compiled and tested.

A more general object of the present invention is to reduce the complexity of writing code objects that are used to generate dynamic web page content.

5 These and other objects are achieved according to the present invention by having a developer isolate a given task, generate code for the task, and then provide a means by which a page-generating servlet can access that code at request time. The code may be generated at any time, and the servlet preferably is generated at translation time, i.e. when a request for the page is first made at the server. In a
10 preferred embodiment, the code for the task is supported within a given method of a tagbean.

 In a preferred embodiment, the present invention is operative within a page handling mechanism at a server. The mechanism enables custom tags to be extended within a eXtensible Markup Language (XML) Document Object Model (DOM). As
15 used herein, a "custom" tag is an element that defines a semantic of given content in the page, which may be uniquely specified by a web page author. Web page authors can use this mechanism to add custom tags to the page markup, with these tags serving as markers that initiate the invocation of tag handlers that, in turn, perform simple macro (i.e. static) substitution or complex algorithmic reorganization and
20 manipulation of the document. To serve the page, the mechanism accesses a flat file and generates XML, which is then parsed into a Document Object Model (DOM) tree having a custom tag.

 At translation time, DOM tree is processed into a servlet, which is then

compiled and class-loaded. During that process, the custom tag is replaced with a script that results in a line of code being present within the servlet. At request time, the line of code within the servlet invokes a method in a custom tagbean to perform a given function. According to the invention, the custom tagbean method is written and
5 stored separately from the other servlet functionality.

The foregoing has outlined some of the more pertinent objects and features of the present invention. These objects should be construed to be merely illustrative of some of the more prominent features and applications of the invention. Many other beneficial results can be attained by applying the disclosed invention in a different
10 manner or modifying the invention as will be described. Accordingly, other objects and a fuller understanding of the invention may be had by referring to the following Detailed Description of the Preferred Embodiment.

006372.00253:0455701.01

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and the advantages thereof, reference should be made to the following Detailed Description taken in connection with the accompanying drawings in which:

Figure 1 is a simplified illustration of a client-server environment in which the present invention may be implemented;

Figure 2 is a high level flowchart illustrating a servlet generation routine of the present invention;

Figure 3 is a flowchart illustrating how one preferred technique for preprocessing a flat file into XML compliant code;

Figure 4 is a flowchart illustrating a preferred algorithm for processing custom tags according to the present invention;

Figure 5 is a flowchart illustrating a custom DOM tag XSL handler routine for an XSL style sheet;

Figure 6 is a flowchart illustrating a custom DOM tag Java handler routine for a Java object;

Figure 7 is a flowchart illustrating the operation of a DOM In, Text Out tagbean;

Figure 8 is a flowchart illustrating the operation of a Text In, Text Out Text tagbean;

Figure 9 is a flowchart illustrating a routine for supporting multiple scripting languages in a single page;

Figure 10 is a flowchart illustrating a routine for collapsing a DOM tree into a fewest number of method calls according to the present invention; and

Figure 11 is a flowchart illustrating a routine for verifying the context of

related XML tag elements in a DOM tree.

006372.00253:0455701.01

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention is a page handling framework and runtime engine operative on a server in a computer network such as the Internet. As is well-known, in the Internet paradigm as illustrated in **Figure 1**, a client machine, such as machine **10**, may use an application, such as a web browser **12**, to access a server **14** via a computer network **16**. Network **16** typically includes other servers (not shown) for control of domain name resolution, routing and other control functions. A representative server **14** is a computer or workstation having at least one processor **18**, system memory (e.g., RAM) **20**, disk or other permanent storage **22**, I/O devices **24a-n**, an operating system **26**, a server program **28**, and an application programming interface (API) **30** that provides extensions to enable application developers to extend and/or customize the core functionality thereof through software programs including plug-ins, CGI programs, Java servlets, and the like. One such software program is an inventive page handling mechanism **32**, which processes an HTTP page request and generates a response by feeding data into an output stream as will be described. In an illustrative embodiment, the page handling mechanism is implemented in Java and is executable in a Java Virtual Machine (JVM) by a processor in a known manner. Alternatively, the program may be written in whole or in part in native code. The inventive functionality, of course, may be part of the integral web server program.

A representative server machine is an IBM Netfinity platform running the Unix operating system and a server program such as IBM WebSphere Version 2.0. Of course, any other computer hardware or software may be used.

A representative client is a personal computer, notebook computer, Internet

appliance or pervasive computing device (e.g., a PDA or palm computer) that is Pentium-, PowerPC®- or RISC-based. The client includes an operating system such as Microsoft Windows, Microsoft Windows CE or PalmOS. A typical client includes a suite of Internet tools including a Web browser, such as Netscape

- 5 Navigator or Microsoft Internet Explorer, that has a Java Virtual Machine (JVM) and support for application plug-ins or helper applications. Communications between the client and the server typically conform to the Hypertext Transfer Protocol (Version 1.0 or higher), and such communications may be made over a secure connection.

The flowcharts of **Figures 2-11** illustrate the inventive functionality of the
10 page handling mechanism.

Servlet Generation

Figure 2 illustrates how a flat web page file is processed according to the present invention to generate a servlet. The routine begins at step **200** by retrieving a flat file from the server's database. At step **202**, a test is made to determine whether a
15 timestamp for the flat file is later than a timestamp for the class load for the file. If the outcome of the test at step **202** is negative, the file has already been processed. Control then branches to step **214**, where the file is invoked as a runtime operation. If the outcome of the test at step **202** is positive, the routine continues at step **204** to preprocess the flat file into XML compliant code and, at step **206**, to transform the
20 XML into a Document Object Model (DOM) data representation. The Document Object Model is a platform- and language-neutral interface that allows programs and scripts to dynamically access and update the content, structure and style of documents. In particular, the Document Object Model provides a standard set of

objects for representing HTML and XML documents, a standard model of how these objects can be combined, and a standard interface for accessing and manipulating them. The Document Object Model (DOM) Level 1 Specification is available from the World Wide Web Consortium.

5 Step **204** is illustrated in more detail in **Figure 3**. Preferably, steps **204-206** are accomplished concurrently using an XML parser, such as the IBM WebSphere XML4J parser. The routine then continues at step **208**. At this step, the DOM along with its namespaces are interpreted to produce a Java object, such as a servlet. This process is illustrated in more detail in **Figure 4**. Thus, according to the invention
10 and, in particular, steps **204, 206** and **208**, the present invention generates a page template via DOM translation of the flat file. At step **210**, the servlet is compiled. The routine then continues at step **212** to class load the servlet. Control then continues at step **214**, which has been previously described.

 Steps **204-212** preferably occur at page translation time. Page translation
15 typically occurs the first time the page (namely, the request for the flat file) is accessed or hit. Step **214** is executed to serve the requested page in response to the originating HTTP client request. In particular, the servlet is invoked with standard HttpRequest and HttpResponse objects, and it generates a response by feeding data into an output stream. The data is provided to the client browser for rendering in the
20 usual manner.

File Preparing

Figure 3 illustrates a preferred technique preparing a flat file into XML compliant code. This was step **204** in **Figure 2**.

The routine begins at step **302** by passing the flat file to the preprocessor. At step **306**, the input stream comprising the flat file is broken into tokens. The routine then performs a test at step **308** to determine whether the stream has any more tokens to process. If so, the routine continues at step **310** to test whether the token is a known JSP (or ASP) symbol. If the outcome of the test at step **310** is positive, the routine branches to step **312** to turn the JSP symbol into an XML tag. If the outcome of the test at step **310** is negative, the routine branches to step **314** to identify any text that violates XML constraints. Following either step **312** or step **314**, the routine continues at step **316** to place the token in an output stream holder. Control then returns to step **308** to process additional tokens. If the outcome of step **308** is negative, however, the routine branches to step **318** to verify that the "jsp:root" tag exists in the stream. At step **320**, the parser turns tag libraries into "jsp:root" namespace attributes. The routine then continues at step **322** by constructing the output stream. This completes the preparsing routine.

15 Processing a DOM with Custom Tags

A preferred algorithm for processing a DOM with custom tags is illustrated in **Figure 4**. Preliminary processing is provided by steps **402-412**. These steps may be omitted. In particular, the routine begins at step **402** by verifying the DOM, for example, with a JSP DTD. At step **404**, the routine adds servlet generation variables to the root element of the DOM for later handling. The routine then continues at step **406** to gather all jsp:directive.page tags to ensure a consistent state. At step **408**, the jsp tag libraries (which provide support for JSP 1.0 mechanisms) are registered with the root element. Thus, for example, custom tags are registered through an XML

<taglib = "tag-library.xml"> tag, according to the JSP 1.0 specification.

By way of brief background, where a plurality of custom tags exist, it is desired to provide a cataloging and registration mechanism to organize the tags and to prevent naming collisions. According to the present invention, a tag library, or

5 "taglib," is used for this purpose. As will be described below, the tag library is preferably specified by a URI and comprises a page, preferably XML, identifying the tag namespace and listing the tags recognized in the namespace as well as the directives on how to load the appropriate tag handlers. Thus, in a representative embodiment, in the tag-library-xml file, the name of the custom tag is listed, as well
10 as a Java object name, or a URL identifying an XSL stylesheet.

The following is an example of a custom tag library:

In the JSP context:

<jsp:root xmlns:sample="/xsp/sample/sample-taglib.xml">
15 </jsp:root>

Here, a namespace "sample" is defined by the relative URL of "/xsp/sample/sample-taglib.xml".

The content at the URL would look as follows:

20 <?xml version="1.0"?>
<taglib>
 <tag name="currentTime"
 class="xsp.sample.CurrentTimeTagBean"
25 dtd="currentTime.dtd"/>
 <tag name="currentTimeXSL"
styleSheet="http://localhost/xsp/sample/currentTimeCustomTag.xml"
 dtd="currentTime.dtd"/>
30 </taglib>

This registers a Java TagBean to handle sample:currentTime

tags and registers the currentTimeCustomTag.xml as an XSL handler for sample:curentTimeXSL. As a bonus, both register currentTime.dtd to verify the correctness of the sample:currentTime and sample:currentTimeXSL tags before the formatting of those tags occurs.

5 Returning now to **Figure 4**, the routine then continues at step **410**. In particular, any additional tag libraries are gathered and registered with a main tag handler. According to the present invention, a tag handler is a process that is used to hand-off execution (of a custom tag in the DOM) to some other process, e.g., a Java object (through a custom tag interface), or via an XSL stylesheet. The routine then
10 continues at step **412** by inserting a `_jspServicemethodDefinition` as the last child of the `jsp:root` element. The `methodDefinition` preferably has the content of most of the servlet code. As will be described in more detail below, the `jsp:block` element is appended to the `methodDefinition` to begin the servlet's definition as a Java code block by default or with as the value of the `jsp page` directive attribute (if it is
15 specified).

The main processing of the routine begins at step **416**. At this step, a test is made to determine whether the DOM tree has any custom tags that have not been processed. If so, the routine branches to step **418** to locate preferably the left-most leaf node of the tree that satisfies its requirements as a custom tag. The routine then
20 continues at step **420** to invoke an appropriate tag handler (e.g., a Java object, the XSL stylesheet, or the like). Two variations of step **420** are illustrated in the flowcharts of **Figures 5-6**. As will be seen, the appropriate tag handler is given a current tag element and is expected to process it. Typically, a new DOM is returned

from the tag handler and is then processed for new tag libraries. At step **422**, the new tag libraries are registered in the tag library registry. The routine then continues at step **424** to gather all new jsp:directive tags. The routine then returns to step **416**.

This loop continues until all custom tags have been processed in a like
5 manner. When the outcome of the test at step **416** is negative, the routine branches to step **426** to collapse the resulting DOM tree into as few as possible method blocks. This operation is illustrated in **Figure 10**. The routine then continues at step **428** to generate the servlet by interpreting scriptlet, expression, declaration and
methodDefinitions. Thus, for example, at step **428**, the routine interprets the DOM by
10 replacing "jsp:scriptlets" with inlined code, by replacing "jsp.expressions" with prints, by replacing "jsp:declarations" with variables and method definitions, by replacing "xsp:methodCalls" with method calls, and by replacing "xsp:methodDefinitions" with method definitions. As described in **Figure 2**, the resulting servlet is then compiled and class loaded to be ready for use by the runtime code.

15 Custom Tag Definition

Preferably, the DOM tree identifies custom tags as follows. As noted above, the JSP 1.0 specification included a tag library mechanism that defines how to plug in a tag. The specification, however, left the details of the taglib mechanism completely open, with the exception that a url must be used to specify the location of the taglib.
20 According to the present invention, this abstract concept has been unified with an XML namespace and mapped into an XML file. In an illustrative embodiment, the Document Type Definition (DTD) for a taglib according to the invention is:

<!ELEMENT taglib (tag)*>


```

<!ELEMENT tag EMPTY>
<!-- Note: either class or styleSheet must exist (but preferably not both) -->
<!ATTLIST tag
    name      CDATA #REQUIRED
5    class    CDATA #IMPLIED
    styleSheet CDATA #IMPLIED
    dtd       CDATA #IMPLIED>

```

This data structure defines that a tag library is composed of zero or more tags. Each tag is defined with a name and optional attributes class, styleSheet, and dtd. A tag must have either a class or styleSheet attribute (but preferably not both) to specify a correct tag handler. The value of name is used to identify what tags it handles. If a tag's name is "scriptlet" and its taglib prefix is "jsp", then this rule handles any tag named "jsp:scriptlet". The class and styleSheet attribute dictate which of the two mechanisms are used to handle a custom tag. If the rule specifies a class, then a Java object, e.g., an object satisfying a custom tag interface, is used to process the tag. If the rule specifies a styleSheet, then an XSLT styleSheet is used to process the tree. The optional dtd parameter is used to verify the contents of the custom tag, for example, whether the tag has the proper attributes.

As noted above, **Figures 5-6** illustrate the preferred tag handling routines. As described, there are two types of tag handling: tags handled by XSLT (**Figure 5**) and tags handled by Java code (**Figure 6**). Each of these handlers will now be described in more detail.

XSL Custom Tag Handler

The XSL tag handler routine begins at step **502** by receiving the DOM element as input. At step **504**, the tag handler then finds the appropriate stylesheet for the element as supplied by the taglib rules. The routine then continues at step **506**

with the tag handler obtaining the element's parent document. At step **508**, the routine invokes a stylesheet processor on the document and stylesheet. Finally, at step **510**, the tag handler returns the new document to complete the translation.

Java Object Custom Tag Handler

5 **Figure 6** illustrates a preferred operation of the custom DOM tag Java object handler. By way of brief background, as used herein, a "tagbean" is a Java object that implements a TagBean interface. Preferably, the interface according to the invention is as follows:

10 public interface TagBean
 {
 public void
 process(Element element);
 }

15 The TagBean interface defines a process method that takes an element in from the DOM tree and performs some function against that element. The context of the entire DOM tree is available to the process method for manipulation through the DOM APIs.

 The routine begins at step **602** with the Java tag handler receiving the DOM
20 element as input. At step **604**, the handler then obtains the appropriate tagbean for the element as supplied by the taglib rules. A number of tagbean routines are illustrated in **Figures 7-9** and will be described in more detailed below. At step **606**, the handler extracts an attributeList from the element. The routine then performs a test at step **608** to determine whether there are any unprocessed attributes. If so, the
25 routine branches to step **610** to determine whether the attribute maps to a setter property on the tagbean. If the outcome of the test at step **610** is negative, control

returns to step **608**. If, however, the outcome of the test at step **610** is positive, the routine continues at step **612** to set the value of the attribute on the tagbean. Control then continues at step **614** to remove the attribute from the attributeList. Processing then continues back at step **608**.

5 Thus, for each attribute in the attributeList, the handler checks for a corresponding setter property on the tagbean. If a corresponding setter property exists, the value of the attribute is set on the tagbean and the attribute is removed from the attribute list. When the outcome of the test at step **608** indicates that all attributes have been checked against the tagbean, routine branches to step **616**. At this step, the
10 tagbean's process method is called given the DOM element so that it can manipulate the tree in whatever manner it deems fit. When tagbean.process() is complete, the new document is returned from the tag handler at step **618**. This completes the processing.

Figures 7-9 illustrate tagbeans that are useful in the present invention.

15 **DOM In, Text Out Tagbean**

Figure 7 illustrates a simple DOM in, Text out macro that has the following class:

```
public abstract class SimpleTagBean implements TagBean  
  
20 {  
    public abstract String  
        translateElement(Element element);  
  
    public final void  
        process(Element element);  
  
25 }
```

SimpleTagBean is a class created to simplify the task of writing a tagbean. Using this class, the developer merely has to implement the translateElement method, which takes in a DOM element and returns the corresponding text macro expansion. In particular, the routine reads the DOM tree (e.g., using the DOM APIs), produces an XML block (typically a scriptlet), and uses the XML block to replace the current element in the tree. This is advantageous to the writer of the tagbean because, using the invention, he or she does not need to know how to create new nodes and to populate them with values. All the writer has to do is create an XML expanded form of the element passed in. While this approach requires increased execution time at translation, translation only happens once every time the page changes; thus, the technique has little impact on server performance.

The SimpleTagBean class works as demonstrated in the flowchart of **Figure 7**. The routine begins at step **702** with the Java tag handler calls SimpleTagBean.process with the appropriate tag element. At step **704**, the SimpleTagBean hands the element off to its subclass's "overwritten" translateElement method. In the translateElement method, at step **706**, the subclass looks at the element and its sub-elements and attributes to produce a text macro expansion of the node. The routine then continues at step **708** with the text expansion being returned to the SimpleTagBean.process method. At step **710**, the XML is parsed backed into DOM. At step **712**, the top node of the new document object replaces the element that was passed in from the previous document. In particular, in step **712**, the top node of the new DOM replaces the element was passed into translateElement(). This completes the processing.

Text In, Text Out Tagbean

Figure 8 illustrates a Text in, Text out tagbean that may be used to isolate the developer from the DOM API. This is especially useful if the element contains only simple information or does simple query string replacement. A representative class is
5 as follows:

```
public abstract class TextTagBean extends SimpleTagBean
{
    public abstract String
    translateText(String text);
10
    public final String
    translateElement(Element element);

    public final void
15    process(Element element);
}
```

TextTagBean extends the SimpleTagBean functionality. In particular, the TextTagBean extends the SimpleTagBean class and implements the translateElement
20 function to inherit the String V DOM output functionality. Instead of the developer writing translateElement, however, he or she now writes translateText.

Referring now to **Figure 8**, the routine begins at step **802** with the Java custom DOM tag handler handing the SimpleTagBean.process the appropriate element. At step **804**, the routine hands the element off to the "overwritten"
25 translateElement method. At step **806**, the translateElement method converts the DOM directly into its corresponding XML. In particular, the TextTagBean.translateElement() takes the element and flattens it into XML without interpreting any of the XML. The routine then continues at step **808**, with the XML then being passed to the translateText method of the subclass. At step **810**, the

translateText method reads the string and processes it to return a new XML string. In particular, translateText looks at the XML string and manipulates it to produce another text representation of it and returns this representation to

TextTagBean.translateElement(). At step **812**, the new XML string is returned to the

5 TextTagBean.translateElement, which returns the string to SimpleTagBean.process.

SimpleTagBean.process finishes the processing at step **814**, by turning the string into

DOM and, at step **816**, by replacing the previous element with the root of the new

document. Thus, in step **816**, the top node of the new DOM replaces the element that was passed into translateElement(). This completes the processing.

10 Multiple Scripting Language Blocks

Another tagbean is illustrated in **Figure 9**. This routine, called jsp:block, enables page developers to use multiple scripting languages in the same page. As will be seen, this enables people with different skill sets to add value to the same page. It also enables the developer to chose another language that might be more suitable for a
15 specific job.

The routine begins at step **902** with each jsp:block handed off to the JSPBlockTagBean. At step **904**, the JSPBlockTagBean chooses the appropriate BlockTagBean according to the language attribute of the jsp:block element. At step **906**, the language-specific BlockTagBean creates a methodDefinition element which,
20 at step **908**, is then filled with code to set up an appropriate runtime environment for the target language. At step **910**, the methodDefinition element is inserted as a child of the root element in the document. The routine then continues at step **912** to create a methodCall element to replace the original jsp:block element.

DOM Tree Processing

Figure 10 illustrates a preferred routine for collapsing the DOM tree into the fewest possible methodCalls. The routine begins at step **1002** to test whether there are any unprocessed methodCalls in the document. If not, the routine is done. If, however, the outcome of the test at step **1002** is positive, the routine continues at step **1004** by setting a variable mc equal to the right-most unprocessed leaf node that is a method call. At step **1006**, the routine sets a variable collapse equal to an attribute mc.getAttribute(collapse). At step **1008**, the collapse attribute is checked. If this attribute is not true, control returns to step **1002**. If the outcome of the test at step **1008** is positive, then the contents of the corresponding methodDefinition are expanded in place, and the methodDefinition and methodCalls are removed from the tree. In particular, the routine continues at step **1010** by setting a variable md equal to the methodDefinition for the methodCall. At step **1012**, a test is run to determine whether any child nodes exist in the methodDefinition element. If not, the routine branches to step **1014** to remove mc from the document, and control returns to step **1002**. If, however, the outcome of the test at step **1012** is positive, the routine continues at step **1016** to let c equal the last child node in the methodDefinition. At step **1018**, c is removed from the methodDefinition. The routine then continues at step **1020** to insert c before mc in the document. Control then returns back to step **1012**. This completes the processing.

For optimization purposes, it is desired to verify context between multiple related XML tags in a DOM. One or more of these related XML tags are custom tags within the context of the inventive framework. By way of brief background, when

processing a single custom tag element, that element may need access to all other related tags, processed and unprocessed, within the DOM. Unfortunately, however, there may be other unprocessed custom tags in the DOM that, when processed, would result in one or more related tags the current element is interested in. One solution to
5 this problem is to pass some state information from the current element through the page handling engine. A preferred technique, however, is to use the DOM itself to indicate state.

Clean-up Processing

Figure 11 is a flowchart illustrating this clean-up processing. The routine
10 begins at step **1102** during the processing of the DOM tree with a current element being processed replacing itself with a placeholder element. The placeholder element includes attributes indicating its state. At step **1104**, a test is performed to determine if a clean-up element already exists for the element being processed. If not, the current element then creates a clean-up element at step **1106**. At step **1108**, this
15 clean-up element is added to the DOM in a position where it will be processed after all elements related to the current element have been processed. Thus, for example, the clean-up element is added to the DOM as a child node to the root position. If the outcome of the test at step **1104** indicates that such a clean-up element already exists, the current element need not create another clean-up element; rather, the current
20 element need only move the existing clean-up element later in the DOM to ensure it is processed after any other related elements might be processed. This is step **1110**.
When the processing routine finally encounters the clean-up element, as indicated by a positive outcome of the test at step **1112**, this element scans the entire DOM for all

the related tags (now placeholders) of interest. This is step **1114**. At step **1116**, the clean-up element loads the state information from each and, at step **1118**, processes them accordingly. When complete, at step **1120**, the clean-up element removes itself from the DOM. In this way, the technique shifts processing from each individual
5 element to a single, last-processed element.

Thus, in the preferred embodiment, a two-pass solution is implemented. In the first pass, simple translation is performed on the tag, creating new tag place holders to be handled by a clean-up phase. For example, assume the DOM includes the following tags: system:macro1, system:macro2, and system:macro3. It is also
10 assumed that each relies on specific information from other tags but not all the information is available until all of them have been touched once. On the first pass, system:macro1 expands to _system_macro1 and performs all the metadata expansion it can perform at this time to assist the clean-up node. At this time, it also inserts a system:cleanup in the tree as the last child of jsp:root (assuming it is not already
15 there).

The second pass is triggered when the clean-up node is hit. For proper processing, it should check to make sure the first pass has completed (no system:macro1 or macro2 or macro3 tags in the tree). If other clean-up nodes exist in the tree, it should remove itself from the tree and let the other nodes handle the
20 clean-up later. Once the clean-up node has determined that the tree is in the correct state, it goes through all the artifacts left by the first process and expands them with all the context available.

Tagbean Code Reduction

Another optimization reduces the amount of code in the tagbeans. By way of background, if a developer expands everything necessary to perform a function of a tag, that process may produce large amounts of code. In particular, the writing of custom tagbeans may result in a large amount of Java code being generated into the

5 resulting servlet. Because this code may be largely common across servlets generated from the same tagbean (variable names might change, but little else), according to the invention, the functionality is delegated to outside code as much as possible. Preferably, the code is factored into a separate Java bean, and the most convenient place to delegate is the very tagbean generating the code. Thus, the tagbean need only

10 generate enough Java code for the servlet to call out to the separate bean. This dramatically reduces the code in the tag bean handler.

As a result, this optimization improves maintainability and greatly simplifies debugging. In addition, because the code is not expanded, the function is hidden from anyone who has access to the generated servlet code. In addition, as a separate Java

15 bean, developers are encouraged to put more error-handling code in the system that may not get put in otherwise. It also further stabilizes the system. Further, the above-described technique reduces the amount of code that needs to be written by the actual page author.

Thus, in a preferred embodiment, instead of doing inline expansion of code,

20 the developer may take runtime values of attributes and sub-elements and generate code to make them parameters of a method on the very same bean that can be called at runtime to do the real work. Thus, according to the invention, at translation time, a custom tag in the DOM tree is replaced, e.g., with a script that results in a line of code

in a generated servlet. In that way, when the servlet is then executed at request time, the line of code invokes a method in a custom tagbean to perform a given function. This technique of writing custom tagbeans is wholly unknown in the prior art.

A more detailed example of this optimization technique is set forth later in
 5 this disclosure.

Examples

As has been previously described, the flowchart of **Figure 2** illustrates the basic translation functionality of the present invention. An example of this operation is now provided. In the following example, mixedLanguages.xsp is a flat input file,
 10 mixedLanguagesDOM1.txt is a representation of the DOM after the input file has been parsed and some metadata has been added to the DOM, mixedLanguagesDOM2.txt is a representation of the DOM after the custom tags in the input file have been processed (in this case, the <block> tag is a custom tag, with the inner tag processed before the outer tag, with the resulting DOM then ready to be
 15 walked by the servlet generator routine), and mixedLanguagesServlet.java is the servlet generated by walking the DOM that complies with the JSP 1.0 specification.

mixedLanguages.xsp

```

    <?xml version="1.0"?>
    <jsp:root>
  20   <jsp:block language="java">
       <jsp:scriptlet>
       String user = request.getParameter("user");
       if (user == null) {
  25   </jsp:scriptlet>
       <b>No one is logged in.</b>
       <jsp:block language="javascript">
       <jsp:scriptlet>
       var int x = 0;
       x = x + 1;
  30   </jsp:scriptlet>
       </jsp:block>
  
```

```

5      <jsp:scriptlet>
        }
        else {
      </jsp:scriptlet>
      <b>Welcome:
      <jsp:scriptlet>
        out.println(user);
      </jsp:scriptlet>
      </b>
10     <jsp:scriptlet>
        }
      </jsp:scriptlet>
      </jsp:block>
15    </jsp:root>

```

mixedLanguagesDOM1.txt

```

20    <jsp:root servletPath="c:\top\xsp\demo\test\mixedLanguagesServlet.java"
      servletPackageName="xsp.test.scripting" servletClassName="mixedLanguagesServlet">
      <jsp:methodDefinition name="_jspService">
      <jsp:block language="java">
        <jsp:block language="java">
          <jsp:scriptlet>
            String user = request.getParameter("user");
            if (user == null) {
25          <b>
            No one is logged in.
            <jsp:block language="javascript">
              <jsp:scriptlet>
                var int x = 0;
30                x = x + 1;
              </jsp:scriptlet>
            }
            else {
35          <b>
            Welcome:
            <jsp:scriptlet>
              out.println(user);
            </jsp:scriptlet>
            }

```

mixedLanguagesDOM2.txt

```

45    <jsp:root servletPath="c:\top\xsp\demo\test\mixedLanguagesServlet.java"
      servletPackageName="xsp.test.scripting" servletClassName="mixedLanguagesServlet">
      <jsp:methodDefinition name="javascriptBlock1">
      <jsp:scriptlet>
        BSFManager bsfManager = new BSFManager();
        BSFEnvironment bsfEnvironment = new BSFEnvironment();
        bsfEnvironment.tempDir = "c:\top\";
        bsfEnvironment.classPath =
        "c:\top\;c:\prog\jdk118\lib\classes.zip;c:\top;c:\prog\xml4j\xml4j_1_1_16.jar;c:\prog\lotusxsl_0

```

```

_17_0\lotusxsl.jar;c:\prog\SQLLIB\java\db2java.zip;c:\prog\SQLLIB\java\runtime.zip;c:\prog\
websphere\appserver\lib\libmwebas.jar;c:\prog\websphere\appserver\lib\jsdk.jar;c:\prog\websphe
re\appserver\lib\jst.jar;c:\top\bsf-1.0b6\lib\bsf.jar;c:\top\bsf-1.0b6\lib\js.jar;c:\top\bsf-1.0b6\lib
\NetRexxC.zip;c:\prog\websphere\appserver\lib\x509v1.jar;.;c:\prog\websphere\appserver\lib\lej
s.jar;c:\c:\prog\websphere\appserver\properties\ej;C:\prog\jdk116\bin\..\classes;C:\prog\jdk11
6\bin\..\lib\classes.zip;C:\prog\jdk116\bin\..\lib\classes.jar;C:\prog\jdk116\bin\..\lib\rt.jar;C:\
prog\jdk116\bin\..\lib\i18n.jar";

```

```

    bsfEnvironment.classLoader = this.getClass().getClassLoader();
    bsfManager.setBSFEnvironment(bsfEnvironment);
10    BSFEngine javascriptInterpreter =
        bsfManager.loadScriptingEngine("javascript");
        javascriptInterpreter.setDebug(true);
        bsfManager.registerBean("request", request);
        bsfManager.registerBean("response", response);
15    bsfManager.registerBean("session", session);
        bsfManager.registerBean("out", out);
        bsfManager.registerBean("pageContext", pageContext);
        bsfManager.registerBean("page", this);
    try {
20        javascriptInterpreter.eval("var request = bsf.lookupBean(\"request\");\nvar response =
bsf.lookupBean(\"response\");\nvar session = bsf.lookupBean(\"session\");\nvar out =
bsf.lookupBean(\"out\");\nvar pageContext = bsf.lookupBean(\"pageContext\");\nvar page =
bsf.lookupBean(\"page\");\n\n    var int x = 0;\n    x = x + 1;\n    ");
        } catch (BSFException e) {
25            Throwable realException = e.getTargetException();
            while (realException instanceof BSFException) {
                realException = ((BSFException) realException).getTargetException();
                while (realException instanceof java.lang.reflect.InvocationTargetException) {
                    realException = ((java.lang.reflect.InvocationTargetException)
30    realException).getTargetException();
                }
            }
            realException.printStackTrace();
            throw new ServletException(realException.getMessage());
35        }
        bsfManager.unregisterBean("request");
        bsfManager.unregisterBean("response");
        bsfManager.unregisterBean("session");
        bsfManager.unregisterBean("out");
40    bsfManager.unregisterBean("config");
        bsfManager.unregisterBean("pageContext");
        bsfManager.unregisterBean("page");
        <jsp:methodDefinition name="_jspService">
        <jsp:scriptlet>
45        String user = request.getParameter("user");
            if (user == null) {
                <b>
                    No one is logged in.
                <jsp:methodCall name="javascriptBlock1">
50        <jsp:scriptlet>
            }
            else {
                <b>
55        Welcome:
            <jsp:scriptlet>

```

```

        out.println(user);
    <jsp:scriptlet>
    }

```

mixedLanguagesServlet.java

```

5  package xsp.test.scripting;

    import org.w3c.dom.*;
    import java.beans.*;
    import com.lotus.xml.xml4j2tx.*;
10  import java.io.*;
    import com.ibm.bsf.*;
    import java.util.*;
    import com.sun.server.http.*;
    import javax.servlet.jsp.*;
15  import com.lotus.xml.*;
    import javax.servlet.*;
    import xsp.*;
    import com.ibm.servlet.pagecompile.*;
    import com.ibm.xml.parser.*;
20  import java.net.*;
    import com.sun.server.util.*;
    import java.lang.*;
    import javax.servlet.http.*;
    import com.ibm.servlet.engine.*;
25  public class mixedLanguagesServlet
        extends xsp.ContractServlet
    {
        public void
30  _jspService(HttpServletRequest req,
                HttpServletResponse res)
            throws ServletException, IOException
        {
            // Cast to HttpService objects for setAttribute/callPage
35  HttpServiceRequest request = (HttpServiceRequest) req;
            HttpServiceResponse response =
                new PCHttpServletResponseProxy((SEHttpServiceResponse) res);
            JspWriter out = null;

40  // Create the JspFactory and obtain the PageContext
            JspFactory factory = JspFactory.getDefaultFactory();
            PageContext pageContext =
                factory.getPageContext(this, // JSP page
45  request, // Servlet request
                response, // Servlet response
                null, // Error page URL
                true, // Servlet session
                0, // JSP buffer size
                true); // JSP autoflush

50  try {
            // Initialize all the implicit variables

```

```

    HttpSession session = request.getSession(true);
    out = pageContext.getOut();
    Object page = this;
    response.setContentType("text/html;charset=ISO-8859-1");
5
    // Now generate fixed template and script code

    String user = request.getParameter("user");
    if (user == null) {
10
        out.print("<b>");
        out.println();
        out.println("No one is logged in.");
        out.println("</b>");
15
        javascriptBlock1(request,
            response,
            session,
            out,
            pageContext,
            page);
20
    }
    else {

        out.print("<b>");
        out.println();
        out.println("Welcome:");
        out.println(user);
25

        out.println("</b>");
30
    }

    } finally {
        out.close();
        ((PCHttpServletResponseProxy) response).writeOutResponse();
        factory.releasePageContext(pageContext);
35
    }
}

public void
40 javascriptBlock1(HttpServiceRequest request,
    HttpServiceResponse response,
    HttpSession session,
    JspWriter out,
    PageContext pageContext,
    Object page)
45 throws ServletException, IOException
{
    BSFManager bsfManager = new BSFManager();
    BSFEnvironment bsfEnvironment = new BSFEnvironment();
50 bsfEnvironment.tempDir = "c:\\top\\";
    bsfEnvironment.classPath =
        "c:\\top\\c:\\prog\\jdk118\\lib\\classes.zip;c:\\top;c:\\prog\\xml4j\\xml4j_1_1_16.jar;c:\\prog\\lotusxsl_0
        _17_0\\lotusxsl.jar;c:\\prog\\SQLLIB\\java\\db2java.zip;c:\\prog\\SQLLIB\\java\\runtime.zip;c:\\prog\\
        websphere\\appserver\\lib\\ibmwebas.jar;c:\\prog\\websphere\\appserver\\lib\\jsdk.jar;c:\\prog\\websphe
60 re\\appserver\\lib\\jst.jar;c:\\top\\bsf-1.0b6\\lib\\bsf.jar;c:\\top\\bsf-1.0b6\\lib\\js.jar;c:\\top\\bsf-1.0b6\\lib

```

```

\\NetRexxC.zip;c:\prog\websphere\appserver\lib\ix509v1.jar;.;c:\prog\websphere\appserver\lib\ej
s.jar;c:\c:\prog\websphere\appserver\properties\ej;c:\prog\jdk116\bin\..\classes;c:\prog\jdk11
6\bin\..\lib\classes.zip;c:\prog\jdk116\bin\..\lib\classes.jar;c:\prog\jdk116\bin\..\lib\rt.jar;c:\
prog\jdk116\bin\..\lib\i18n.jar";

```

```

5      bsfEnvironment.classLoader = this.getClass().getClassLoader();
      bsfManager.setBSFEnvironment(bsfEnvironment);
      BSFEngine javascriptInterpreter =
          bsfManager.loadScriptingEngine("javascript");
      javascriptInterpreter.setDebug(true);
10     bsfManager.registerBean("request", request);
      bsfManager.registerBean("response", response);
      bsfManager.registerBean("session", session);
      bsfManager.registerBean("out", out);
      bsfManager.registerBean("pageContext", pageContext);
15     bsfManager.registerBean("page", this);
      try {
          javascriptInterpreter.eval("var request = bsf.lookupBean(\"request\");\nvar response =
bsf.lookupBean(\"response\");\nvar session = bsf.lookupBean(\"session\");\nvar out =
bsf.lookupBean(\"out\");\nvar pageContext = bsf.lookupBean(\"pageContext\");\nvar page =
20     bsf.lookupBean(\"page\");\n\n        var int x = 0;\n        x = x + 1;\n        ");
      } catch (BSFException e) {
          Throwable realException = e.getTargetException();
          while (realException instanceof BSFException) {
              realException = ((BSFException) realException).getTargetException();
25          while (realException instanceof java.lang.reflect.InvocationTargetException) {
              realException = ((java.lang.reflect.InvocationTargetException)
realException).getTargetException();
          }
      }
30      realException.printStackTrace();
      throw new ServletException(realException.getMessage());
  }
      bsfManager.unregisterBean("request");
      bsfManager.unregisterBean("response");
35      bsfManager.unregisterBean("session");
      bsfManager.unregisterBean("out");
      bsfManager.unregisterBean("config");
      bsfManager.unregisterBean("pageContext");
      bsfManager.unregisterBean("page");
40  }
}

```

The following illustrates more generally how an input file is translated into a DOM data structure. In particular, for a given input file:

```

45  <a>
      <b>
          <c/>
          <d/>
          </b>
50  <e>
      <f/>

```



```

    <g/>
    <h/>
    </e>
    </a>,

```

5

the DOM data structure would look as follows:

```

a
|--b
10 | |--c
   | |--d
   |
   |--e
15   |--f
      | |--g
      |--h

```

Thus, in this example, node a is a parent node that has child nodes b and e. Node b has child nodes c and d, and node e has child nodes f and h. Node f has child node g.

20 In the preferred embodiment, the order of node execution would then be as follows: c, d, b, g, f, h, e and a. The value of executing the nodes in an inside-out fashion is that the innermost tagbean can replace itself with a JSP syntax element that is well known to an outer tagbean so that the outer tagbean knows how to process the internal element.

25 For example, in the case of the multi-language support, like:

```

<block language="java">
  <jsp:scriptlet>
    javaExpression;
30   javaExpression2;
  </jsp:scriptlet>
  <block language="javascript">
    <jsp:scriptlet>
      javascriptExpression;
35   javascriptExpression2;
    </jsp:scriptlet>
  </block>
</block>

```

40 The block tag is a custom tag. When this tag executes, it transforms everything inside it into Java code. The invention is able to transform the contained

custom tag because the innermost custom tag preferably is handled first, and such processing leaves behind a well known tag that the outer most custom tag handler knows how to transform.

The following code illustrates how scripting language blocks may be used to support multiple scripting languages in a single web page. As described above, nesting of different scripting languages is supporting by marking where one section, or "block", of code begins and where it ends. For example, the following snippet has JavaScript code nested within REXX code nested within Java code:

```
10  if (true)      {
        say I am true
        if also Tue then do
            var i = 5;
        end
        System.out.println(bean.getProperty());
15  }
```

If this code were to appear in a web page, the blocks of code may be marked as follows:

```
20  <BLOCK language="java">
        if (true)      {
                <BLOCK language="netrexx">
                        say I am true
                        if also True then do
                                <BLOCK language="javascript">
                                        var i = 5;
25  </BLOCK>
                        end
                </BLOCK>
                        System.out.println(bean.getProperty());
30  }
    </BLOCK>
```

In the above example, it can be seen that "end" is associated with "if also True then

do" and not, for example, with "var i =5." This enables the code to correctly process all the languages at runtime. In the above example, it should be noted that the blocks are nested. This is not a limitation. Indeed, there is no reason they cannot be peers, as below:

```
5  <BLOCK language="java">
    // a little Java code here
    </BLOCK>
    <BLOCK language="javascript">
    /* some JavaScript code here */
10 </BLOCK>.
```

As described, the implementation compiles a web page into a XML (eXtensible Markup Language) DOM (Document Object Model), and from there, into a Java servlet. In the DOM stage, the routine looks for BLOCK nodes. When
15 encountering one, the routine creates a new node representing a Java method definition as a child of the root element, and replaces the BLOCK node with a node representing a Java method call to the new method definition. The block's child nodes are then moved under the method definition. Java servlet code is then generated under the method definition to pass the script code contained in the block to
20 an appropriate interpreter for the scripting language specified by the block's "language" attribute.

The same operation is done for nested blocks. The innermost block is turned into a method definition and replaced by the method call node. When the next outer block is processed into its method definition, the block must turn any method call
25 nodes among its children into valid method calls into the servlet written in the outer block's language. In the nested example above, the resulting Javaserlet might then

contain code as follows:

```

protected void
javaBlock0(args)
{
5      if (true)      {
                        netrexxBlock0(args);
                        System.out.println(bean.getProperty());
                        }
    }
10  protected void
    javascriptBlock0(args)
    {
        javascriptInterpreter.process("var i = 5;");
    }
15  protected void
    netrexxBlock0(args)
    {
        netrexxInterpreter.process("say I am true \n if alsoTrue then do \n
thisServlet.javascriptBlock0(args)\n end");
20  }

```

The bolded text above represents the method call node transformed into a valid method call in the particular scripting language. Because in the preferred embodiment the runtime is written in Java, a special interpreter is not required to

25 handle the javaBlock0 script code.

The following illustrates how the invention verifies context between multiple related XML tags. This example starts with a sample input XML chunk and ends with a code chunk for use in the final servlet:

```

(1) xml
30  <trace:sink file="/myTrace.out">
    <trace:output>foo + bar</trace:output>
    </trace:sink>

(2) trace:output is handled by TagBean
35  - creates a marker with all currently known state
    - creates a trace:cleanup-markers tag which will signal the 2nd pass
    <trace:cleanup-markers/>
    <trace:sink file="/myTrace.out">

```

```

    <_trace_output_marker>foo + bar</_trace_output_marker>
</trace:sink>

```

(3) trace:sink is handled

- 5 - produces scriptlets to handle body of the work
 - adds metadata to _trace_output_marker

```

<trace:cleanup-markers/>

```

```

<jsp:scriptlet>

```

```

    try

```

10

```

        FileWriter fileWriter = new FileWriter("/myTrace.out");

```

```

        PrintWriter printWriter = new PrintWriter(fileWriter);

```

```

    </jsp:scriptlet>

```

- 15 <_trace_output_marker output="printWriter">foo +
 bar</_trace_output_marker>

```

    <jsp:scriptlet>

```

```

        } finally {

```

```

            printWriter.flush();

```

```

            fileWriter.flush();

```

20

```

            printWriter.close();

```

```

            fileWriter.close();

```

```

        }

```

```

    </jsp:scriptlet>

```

- 25 (4) trace:cleanup-markers is handled

 - replaces _trace_output_marker with a jsp:scriptlet

```

    <jsp:scriptlet>

```

```

        try

```

30

```

            FileWriter fileWriter = new FileWriter("/myTrace.out");

```

```

            PrintWriter printWriter = new PrintWriter(fileWriter);

```

```

    </jsp:scriptlet>

```

```

    <jsp:scriptlet>

```

```

        printWriter.println(foo + bar);

```

35

```

    </jsp:scriptlet>

```

```

    <jsp:scriptlet>

```

```

        } finally {

```

```

            printWriter.flush();

```

```

            fileWriter.flush();

```

40

```

            printWriter.close();

```

```

            fileWriter.close();

```

```

        }

```

```

    </jsp:scriptlet>

```

- 45 (5) final translation step of jsp:scriptlet to Java code

```

        try

```

```

            FileWriter fileWriter = new FileWriter("/myTrace.out");

```

```

            PrintWriter printWriter = new PrintWriter(fileWriter);

```

50

```

            printWriter.println(foo + bar);

```

```

        } finally {

```

```

            printWriter.flush();

```

```

            fileWriter.flush();

```

```

            printWriter.close();

```

```
    fileWriter.close();  
}
```

As also noted above, the present invention provides a technique for reducing the amount of code in the tagbeans. An example of this optimization technique is

5 now provided.

The following ServletTagBean.j is the original code file:

```
package xsp.was;
```

```
import xsp.*;  
10 import java.util.*;  
import org.w3c.dom.*;  
import javax.servlet.jsp.*;
```

```
15 public class ServletTagBean extends SimpleTagBean  
{  
    protected String name = null;  
    protected String code = null;  
    protected String codebase = null;  
20  
    public void  
    setName(String name)  
    {  
25        this.name = name;  
    }  
  
    public void  
30    setCode(String code)  
    {  
        this.code = code;  
    }  
  
35    public void  
    setCodebase(String codebase)  
    {  
40        this.codebase = codebase;  
    }  
  
    public String  
45    translateElement(Element element)  
    {  
        Hashtable initParams = parseInitParams(element);
```

```
        // For each param sub element, add the name/value to a map for later
```

```

        Hashtable paramMap = Utility.parseParams(element);

        // The name or code parameter must be set.
        if (name == null && code == null) {
5           // Error!!!
            System.out.println("Error: name and code can not be null the same time");
            return null;
        }

10
        StringBuffer buff = new StringBuffer();
        buff.append("\n")
            .append("<")
            .append(ScriptletTag)
15            .append(">\n\n")
            .append("try {\n")
            .append("    String _code = null;\n");

        if (name == null) {
20            buff.append("    String _name = null;\n");
        }
        else {
            buff.append("    String _name = \"")
25                .append(name)
                .append("\";\n");
        }

        if (code != null) {
30            buff.append("    _code = \"")
                .append(code)
                .append("\";\n\n");
        }

        buff.append("\n    if (_name == null || _name.equals(\"\")) {\n")
35            .append("        _name = _code;\n")
            .append("    }\n\n")
            .append("    Servlet _s = \n")
            .append("        getServletConfig().getServletContext().")
            .append("getServlet(_name);\n")
40            .append("    if (_s == null) {\n")
            .append("        Properties _init = new Properties();\n")
            .append("        _init.put(\"name\", \"")
            .append(name)
            .append("\");\n");

45
        if (code != null) {
            buff.append("        _init.put(\"code\", \"")
                .append(code)
                .append("\");\n");
50        }

        if (initParams.size() > 0) {
            Enumeration e = initParams.keys();
            while (e.hasMoreElements()) {
55                String key = (String) e.nextElement();

```

```

String value = (String) initParams.get(key);
buff.append("    _init.put(\"")
        .append(key)
        .append("\", \"")
5        .append(value)
        .append("\");\n");
    }
}

10
if (codebase != null) {
    buff.append("    _init.put(\"codebase\", \"")
        .append(codebase)
        .append("\");\n")
15        .append("    _s = ")
        .append("com.sun.server.http.pagecompile.\n")
        .append("\tServletUtil.loadServlet(this,")
        .append("\n\t\t\t\t\t_name,\n\t\t\t\t\t_code, ")
        .append("\n\t\t\t\t\t")
20        .append(codebase)
        .append("\", \n\t\t\t\t\t_init);\n");
}
if (codebase == null) {
    buff.append("    _s = ")
25        .append("com.sun.server.http.pagecompile.\n\tServletUtil.")
        .append("loadServlet(this,")
        .append("\n\t\t\t\t\t_name,")
        .append("\n\t\t\t\t\t_code,\n\t\t\t\t\ttnull,")
        .append("\n\t\t\t\t\t_init);\n");
30 }

buff.append(" }\n\n");

35
if (paramMap.size() > 0) {
    buff.append(" java.util.Hashtable _parm = new ")
        .append(" java.util.Hashtable();\n");

    Enumeration e = paramMap.keys();
40    buff.append(" String[] _vals; \n");

    while (e.hasMoreElements()) {
        String key = (String) e.nextElement();
        String value = (String) paramMap.get(key);
45        buff.append(" _vals = new String[1];\n")
            .append(" _vals[0] = \"")
            .append(value)
            .append("\");\n")
            .append(" _parm.put(\"")
50            .append(key)
            .append("\", _vals);\n");
    }
}

55 buff.append("\n out.flush();");

```


[illegible]

```

        initParams.put(nodeName, nodeValue);
    }
}
return initParams;
5    }
}

```

The following class, ServletTagBean.java, is the recoded class using the delegation model of the invention.

```

10  package xsp.was;

import xsp.*;
import java.io.*;
import java.util.*;
15  import org.w3c.dom.*;
import javax.servlet.*;
import javax.servlet.http.*;
import javax.servlet.jsp.*;
import com.sun.server.http.pagecompile.*;
20

public class ServletTagBean extends SimpleTagBean
{
    protected static int count = 0;
25

    public String
    translateElement(Element element)
    {
30        Properties initParameters = parseInitParams(element);
        Hashtable runtimeParameters = Utility.parseParams(element);

        String name = (String) initParameters.get("name");
        String code = (String) initParameters.get("code");
35        String codebase = (String) initParameters.get("codebase");

        // The name or code parameter must be set.
        if ((name == null) &&
            (code == null)) {
40            System.out.println("Error: name and code can not be null the same time");
            return null;
        }
        int currentCount = ++count;

45        String initParametersName =
            "_xsp_servletTagBean_initParameters" + currentCount;

        String runtimeParametersName =
50        "_xsp_servletTagBean_runtimeParameters" + currentCount;

        String output =

```

```

    INDENT2 + "<jsp:scriptlet>\n" +
    INDENT2 + "Properties " + initParametersName + " = " +
    " new Properties();\n" +
    INDENT2 + "Properties " + runtimeParametersName +
5    " = new Properties();\n";

    Enumeration enumeration = initParameters.keys();
    while (enumeration.hasMoreElements()) {
    String key = (String) enumeration.nextElement();
10    String value = (String) initParameters.get(key);
    output +=
        INDENT2 + initParametersName + ".put(" +
        stringify(key) + ", " +
        stringify(value) + ");";
15    }
    enumeration = runtimeParameters.keys();
    while (enumeration.hasMoreElements()) {
    String key = (String) enumeration.nextElement();
    String value = (String) runtimeParameters.get(key);
20    output +=
        INDENT2 + runtimeParametersName + ".put(" +
        stringify(key) + ", " +
        stringify(value) + ");";
    }
25    output +=
        INDENT2 + "xsp.was.ServletTagBean.runServlet(this, \n" +
        INDENT3 + "request,\n" +
        INDENT3 + "response,\n" +
        INDENT3 + initParametersName + ",\n" +
30    INDENT3 + runtimeParametersName + ");";

    output +=
        INDENT2 + "</jsp:scriptlet>\n";
35    return output;
    }

    protected static final String
    normalize(String input)
    {
        if (input == null) {
            return null;
        }
45    input = input.trim();
        if (input.equals("")) {
            return null;
        }
        return input;
50    }

    protected static final String
    stringify(String input)
55    {
```

```
        if (input == null) {
            return "null";
        }
        return "\"" + input + "\"";
5    }

    public static void
    runServlet(Servlet containingServlet,
10        HttpServletRequest request,
        HttpServletResponse response,
        Properties initParameters,
        Properties runtimeParameters)
        throws ServletException, IOException
15    {
        String name = normalize((String) initParameters.get("name"));
        String code = normalize((String) initParameters.get("code"));
        String codebase = normalize((String) initParameters.get("codebase"));

20        if ((name == null) &&
            (code == null)) {
            throw new IllegalStateException("name or code must be non-null");
        }
        if (name == null) {
25            name = code;
        }
        initParameters.put("name", name);
        if (code != null) {
            initParameters.put("code", code);
30        }
        Servlet servlet = ServletUtil.loadServlet(containingServlet,
                                                    name,
                                                    code,
                                                    codebase,
35            initParameters);

        if (!runtimeParameters.isEmpty()) {
            request = new ParamsHttpServletRequest(request, runtimeParameters);
        }
40        ServletUtil.callServlet(servlet, name, request, response);
    }

    public Properties
    parseInitParams(Element element)
45    {
        Properties initParams = new Properties();

        NamedNodeMap namedNodeMap = element.getAttributes();
50        int attributeLength = namedNodeMap.getLength();

        Node attributeNode = null;
        String nodeName = null;
        String nodeValue = null;
55    }
```

```

    for (int i = 0; i < attributeLength; i++) {
        attributeNode = namedNodeMap.item(i);
        nodeName = attributeNode.getNodeName();
        nodeValue = attributeNode.getNodeValue();
5
        initParams.put(normalize(nodeName),
                        normalize(nodeValue));
    }
    return initParams;
10 }
}

```

The developer need not write code generation code to produce code that will be robust for every possible input scenario. Instead, the developer need only write the code once, and the only code generation is used to delegate to the method that is

15 written once.

So, to provide a generic example:

1. String output = "out.write(\"\" + string + "\");";

becomes:

2. String output = "PrintTagBean.print(out, \"\" + string + "\");";

20 The out.write() is moved into a method print() on PrintTagBean:

```

public static void
print(Writer out,
     String string)
{
25   out.write(string);
}

```

As can be seen, in the first case, the code relies upon a variable 'out' that exists in the servlet. The write() method was called on 'out' passing it a string. Thus, to

30 perform proper delegation, a method on PrintTagBean is created that takes 'out' and the 'string' and call\$out.write(string)".

Thus, according to the invention, at translation time, a custom tag in the DOM

tree is replaced, e.g., with a script that results in a line of code in a generated servlet. In this way, when the servlet is then executed at request time, the line of code invokes a method in a custom tagbean to perform a given function.

If the code generated to handle runtime requests is longer than the code
5 generated to pass the necessary variables to a method to be processed, there are several benefits to this approach. First, writing code to generate code is a very tedious and error-prone task; thus, reducing this code even slightly reduces the numbers of errors drastically. Second, using this approach, all the code handling of a task is actually handled in a single method that can be carefully crafted to handle correct
10 inputs to produce the right output. Because this code is in the tagbean, it can be compiled immediately and checked for language syntax errors. If, instead, the code is generated each time, it will not be compiled until an XSP is written to test the functionality. Moreover, with branching (if statements) in code generation, it may take several tests just to test the syntax of all the possible code generations. Further,
15 if the developer needs to change the function and "optimization" has already taken place, then the developer need only update a single method. Otherwise, the developer must go through the process of updating all the code generating code.

Because of this reduction in code and code complexity, the maintenance
20 of the code will be much lower.

The present invention provides numerous other advantages over the prior art. In effect, the inventive page handling mechanism combines the manipulation and template mechanism of XSLT with the scripting capabilities of the JSP/ASP model.

In addition, the invention provides a framework for enabling any programming language to be plugged into that model. Further, given that most languages are easily defined in Java byte code, the invention is economical to implement in a runtime using, for example, a Java Virtual Machine.

5 The present invention uses custom DOM tags together with a framework and runtime that provides a powerful macro language to XML/JSP. The custom DOM tags allow a web page author the ability to define a simple markup language tag, e.g., <SHOPPING_CART>, that, at page translation time, is converted into script code by a generic Java object or an XSL stylesheet. This script code is then compiled into
10 Java code and then into a Java servlet, yielding excellent performance servicing a client's request. Because the custom tag replaces the script code in the authored page, the page is kept clean and easy to maintain. The script code is kept separate and, thus, need only be debugged once. Normal ASP development, on the contrary, would force this code to remain in the page, and it would have to be debugged after every
15 modification.

 The inventive framework is quite advantageous in that it is built on top of XML. Moreover, one of ordinary skill will appreciate that the framework is defineable programmatically or with XSL. In addition, macros written according to the invention can affect the output of an entire page and not just the content between a
20 given pair of tags.

 The invention also enables one or more web page authors to support multiple scripting languages in a single web page. Further, in a preferred embodiment, the context of multiple related XML tags in a DOM may be verified by using the DOM

itself to indicate state information.

As noted above, the inventive mechanism is preferably implemented in or as an adjunct to a web server. Thus, the invention does not require any modifications to conventional client hardware or software. Generalizing, the above-described

5 functionality is implemented in software executable in a processor, namely, as a set of instructions (program code) in a code module resident in the random access memory of the computer. Until required by the computer, the set of instructions may be stored in another computer memory, for example, in a hard disk drive, or in a removable memory such as an optical disk (for eventual use in a CD ROM) or floppy disk (for
10 eventual use in a floppy disk drive), or downloaded via the Internet or other computer network.

In addition, although the various methods described are conveniently implemented in a general purpose computer selectively activated or reconfigured by software, one of ordinary skill in the art would also recognize that such methods may
15 be carried out in hardware, in firmware, or in more specialized apparatus constructed to perform the required method steps.

Further, as used herein, a Web "client" should be broadly construed to mean any computer or component thereof directly or indirectly connected or connectable in any known or later-developed manner to a computer network, such as the Internet.

20 The term Web "server" should also be broadly construed to mean a computer, computer platform, an adjunct to a computer or platform, or any component thereof. Of course, a "client" should be broadly construed to mean one who requests or gets the file, and "server" is the entity which downloads the file.

Having thus described my invention, what I claim as new and desire to secure by Letters Patent is set forth in the following claims.

006372.00253:0455701.01

CLAIMS

1. A method for serving a page, comprising the steps of:
generating an object having a method for performing a given task ;
5 at translation time:
replacing a tag in a document object model (DOM) with a
script; and
processing the DOM to generate executable code having a call
that is generated as a result of the script; and
10 at request time, having the call invoke the method in the object.
2. The method as described in Claim 1 wherein the object is a custom
tagbean.
3. The method as described in Claim 1 wherein the executable code is a
15 servlet.
4. The method as described in Claim 3 wherein the call is a line of code
in the servlet.
- 20 5. The method as described in Claim 1 wherein access to the servlet is
unrestricted and access to the object is restricted.
6. The method as described in Claim 1 wherein the object include
25 error-handling code.
7. The method as described in Claim 1 further including the steps of:
processing a given file into XML compliant code; and
translating the XML compliant code into the DOM.
- 30 8. The method as described in Claim 1 wherein the DOM is a tree having
the tag located at a given node.
9. The method as described in Claim 1 wherein the tag is a marker for
initiating invocation of a tag handler.
- 35 10. The method as described in Claim 9 wherein the tag handler performs
a macro substitution.
11. The method as described in Claim 9 wherein the tag handler performs
40 an algorithmic reorganization of the DOM.

12. A method for serving a web page, comprising the steps of:

in an off-line process, generating an custom tagbean having a method for performing a given task ;

5 at translation time:

generating a document object model (DOM) tree representation of the page, replacing a custom tag in the DOM tree with a script; and

processing the DOM tree to generate a servlet having a call generated
as a result of the script; and
10 at request time, having the call invoke the method in the custom tagbean.

13. The method as described in Claim 12 further including the steps of:
processing a given file into XML compliant code; and
translating the XML compliant code to generate the DOM tree.

15

14. A method for reducing an amount of code in a custom tagbean, comprising the steps of:

isolating a given task in an object having a method;
at translation time:

replacing a tag in a document object model (DOM) with a script; and
processing the DOM to generate executable code having a call that is
generated as a result of the script; and
at request time, having the call invoke the method in the object.

15. A computer program product, comprising:

a custom tagbean having a method for performing a given task;

means operative at translation time (a) for replacing a tag in a document object
5 model (DOM) with a script; and (b) processing the DOM to generate executable code
having a call that is generated as a result of the script;

wherein, at request time, the call invokes the method in the custom tagbean to perform the given task.

10 **16.** The computer program product as described in Claim **15** wherein the means operative at translation time further includes means for processing a given flat file into XML compliant code, and means for translating the XML compliant code to generate the DOM.

17. A server, comprising:

a processor;

5 memory coupled to the processor for storing an object having a method for performing a given task;

program means executable by the processor and operative at translation time

(a) for processing a given flat file into XML compliant code, (b) for translating the XML compliant code to a Document Object Model (DOM) tree, (c) for replacing a custom tag in the DOM tree with a script, and (d) for processing the DOM tree to
10 generate executable code having a call that is generated as a result of the script;

wherein, at request time, the call invokes the method in the object to perform the given task.

18. The server as described in Claim 17 wherein the executable code is a
15 Java servlet.

19. The server as described in Claim 17 wherein the program means further includes means for compiling and class loading the Java servlet.

20. The server as described in Claim 17 wherein the object is a custom
20 tagbean.

ABSTRACT OF THE DISCLOSURE

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

1/7

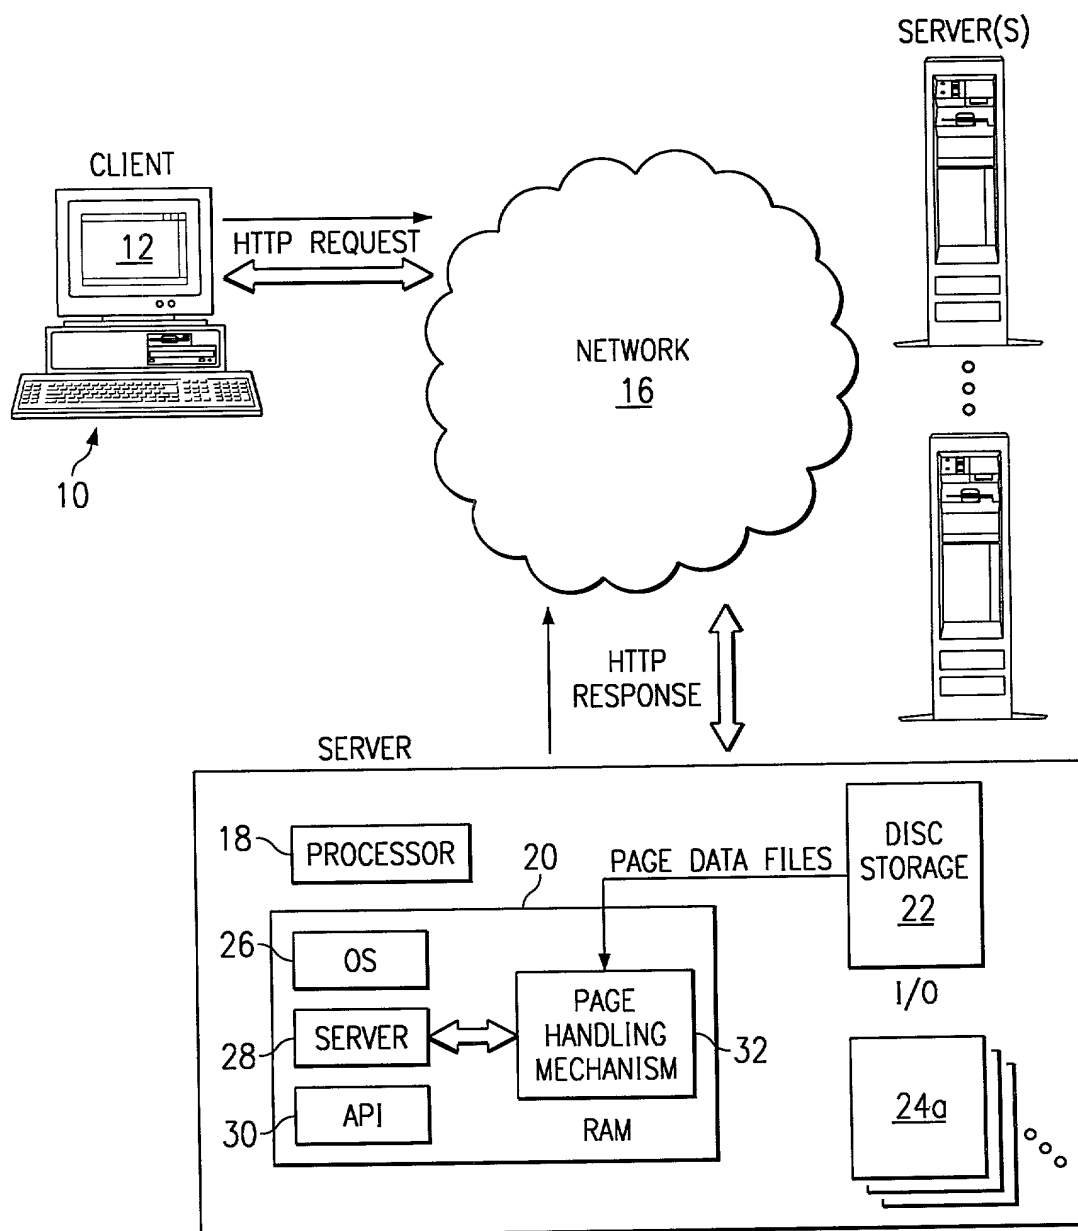


FIG. 1

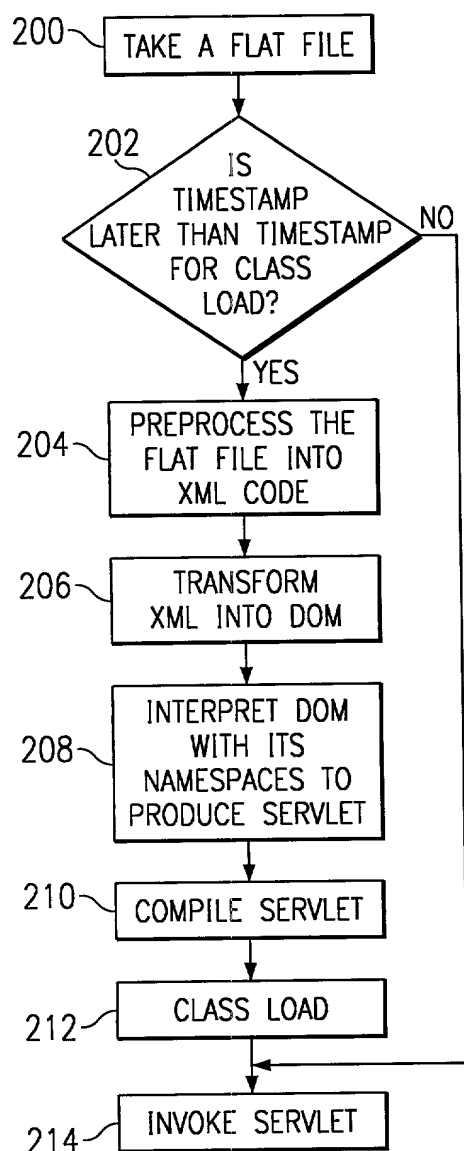
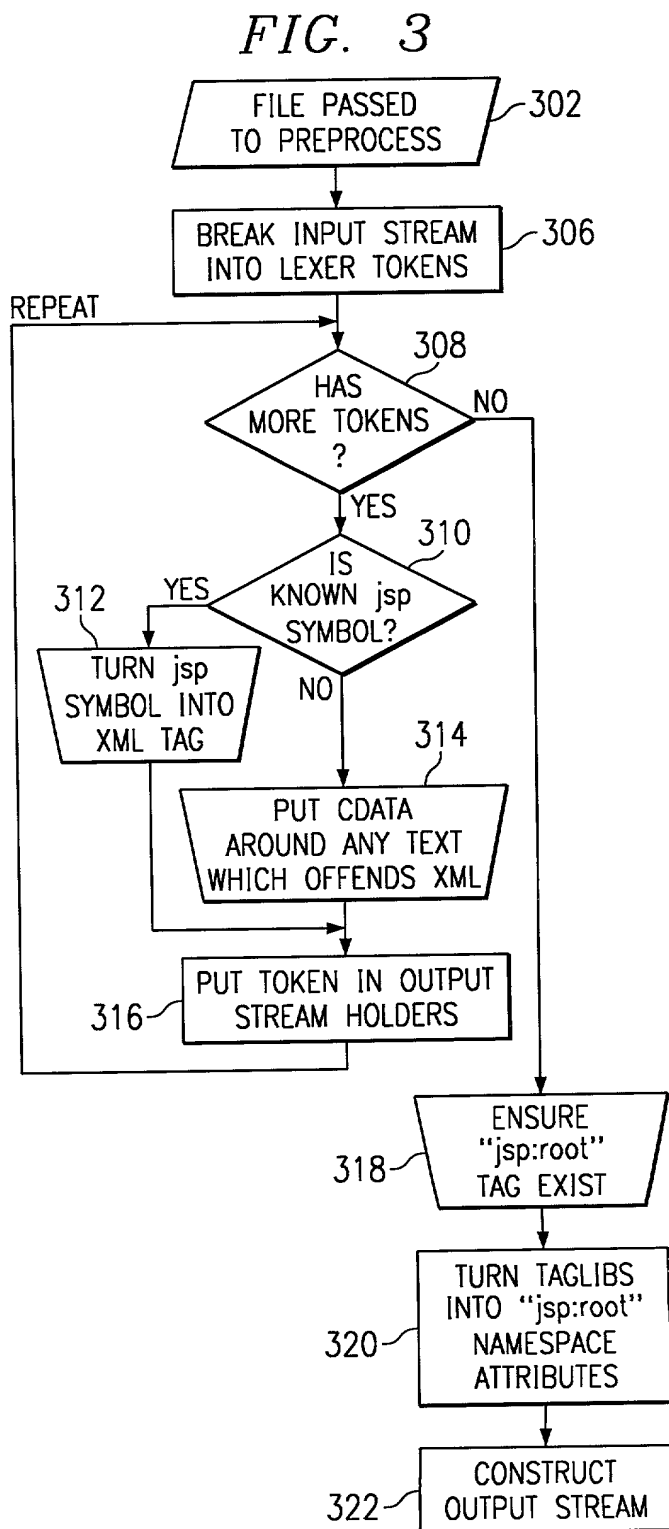


FIG. 2



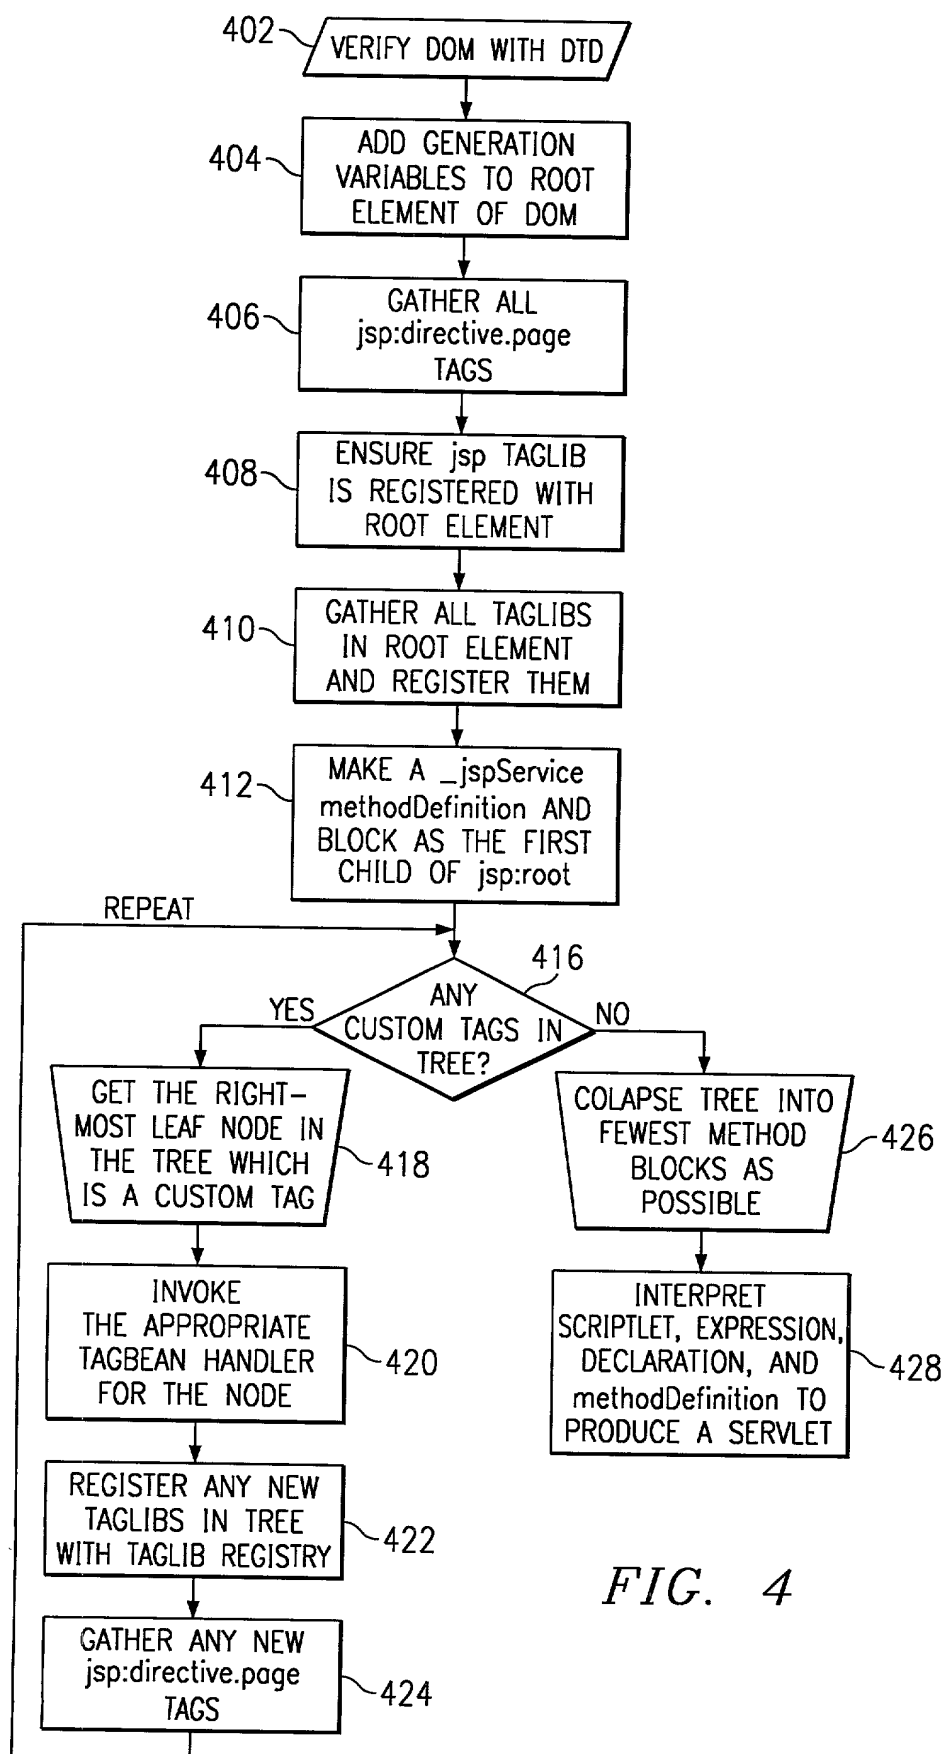


FIG. 4

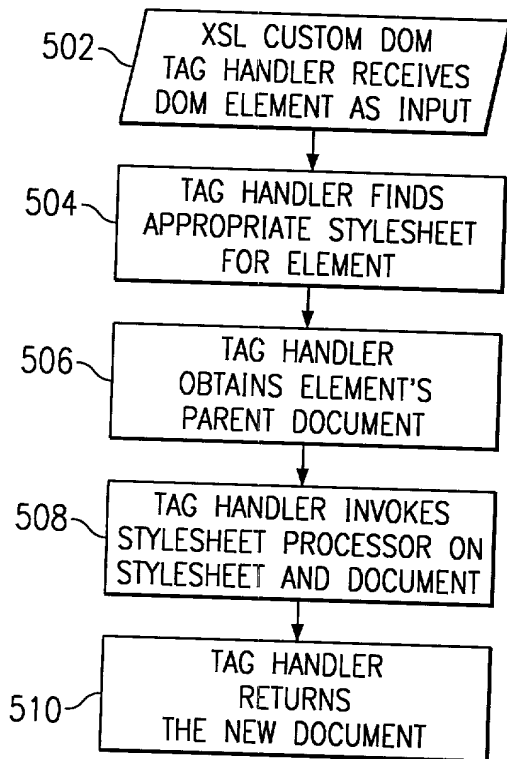
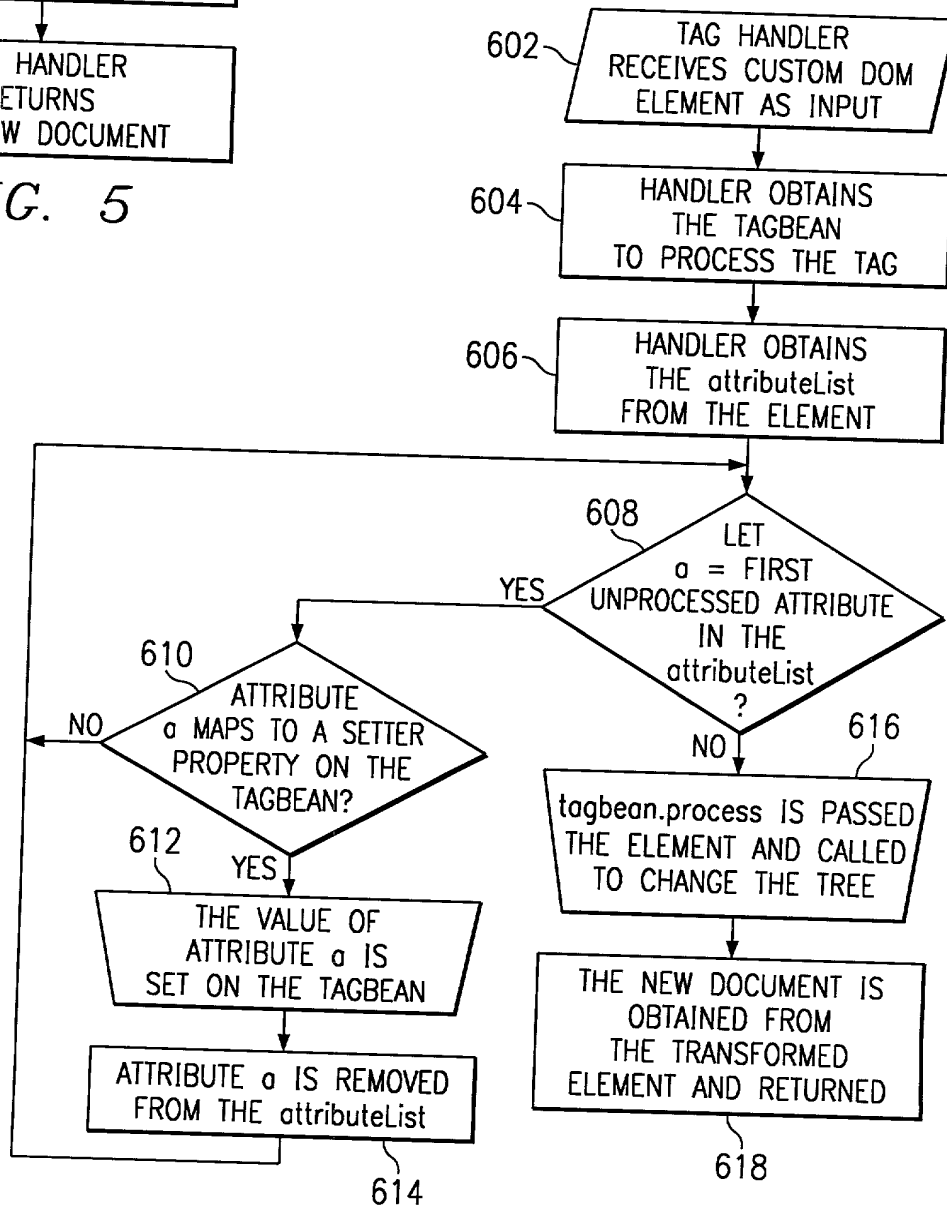


FIG. 5

FIG. 6



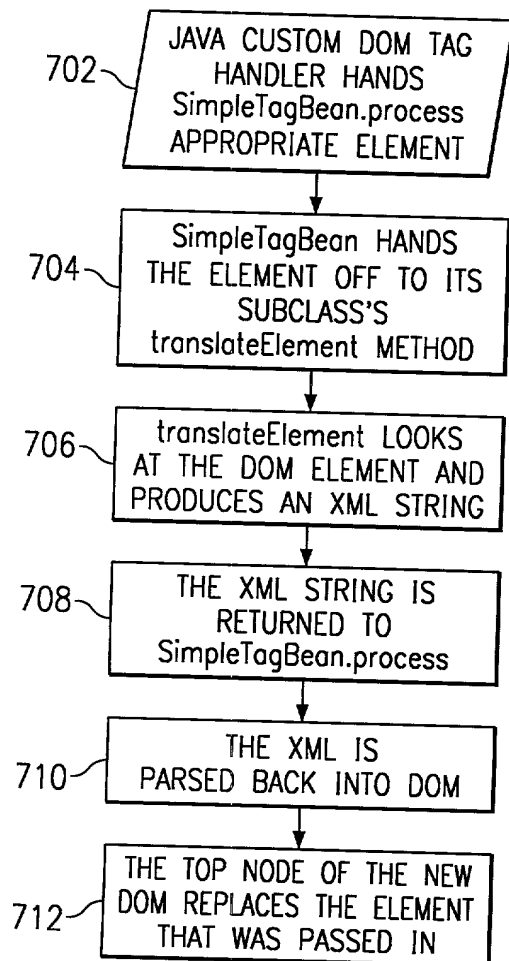


FIG. 7

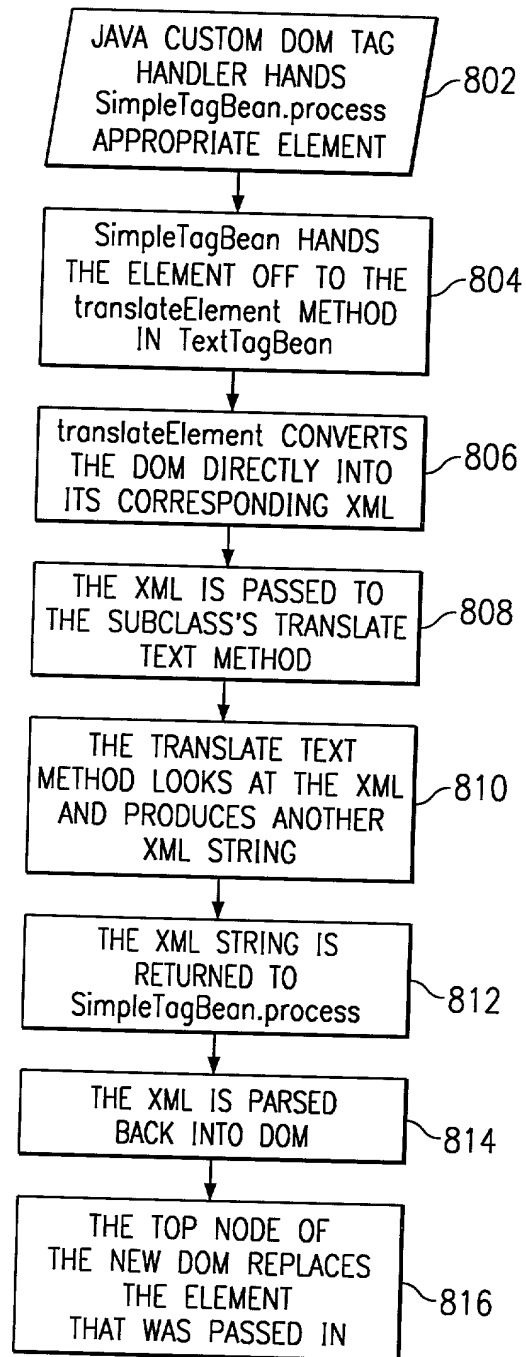


FIG. 8

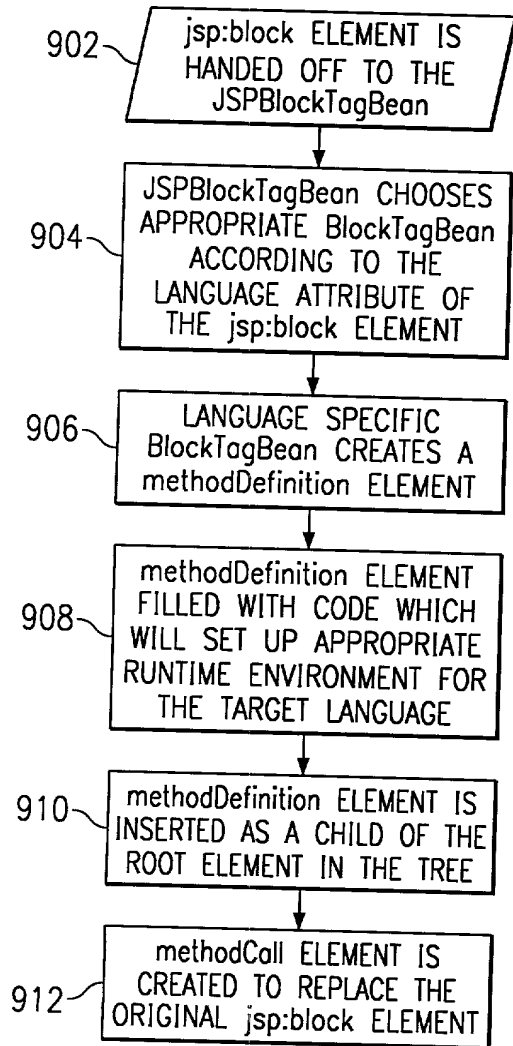
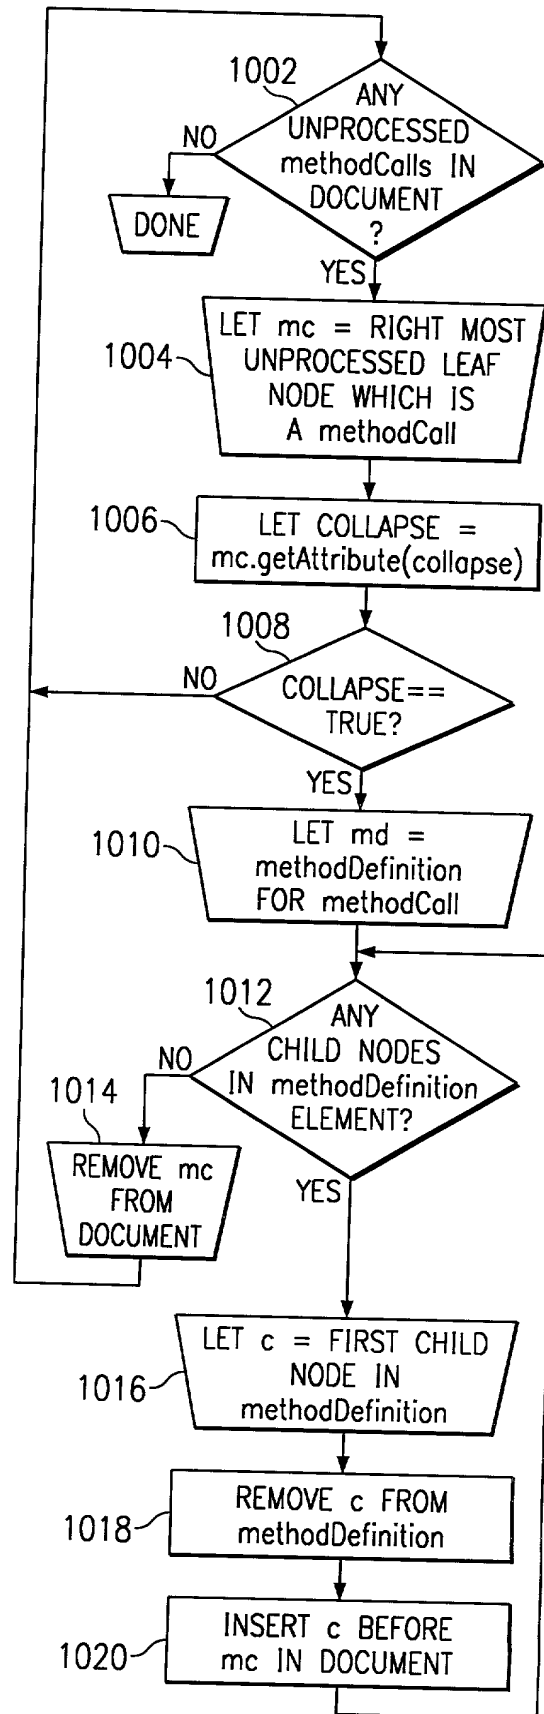


FIG. 9

FIG. 10



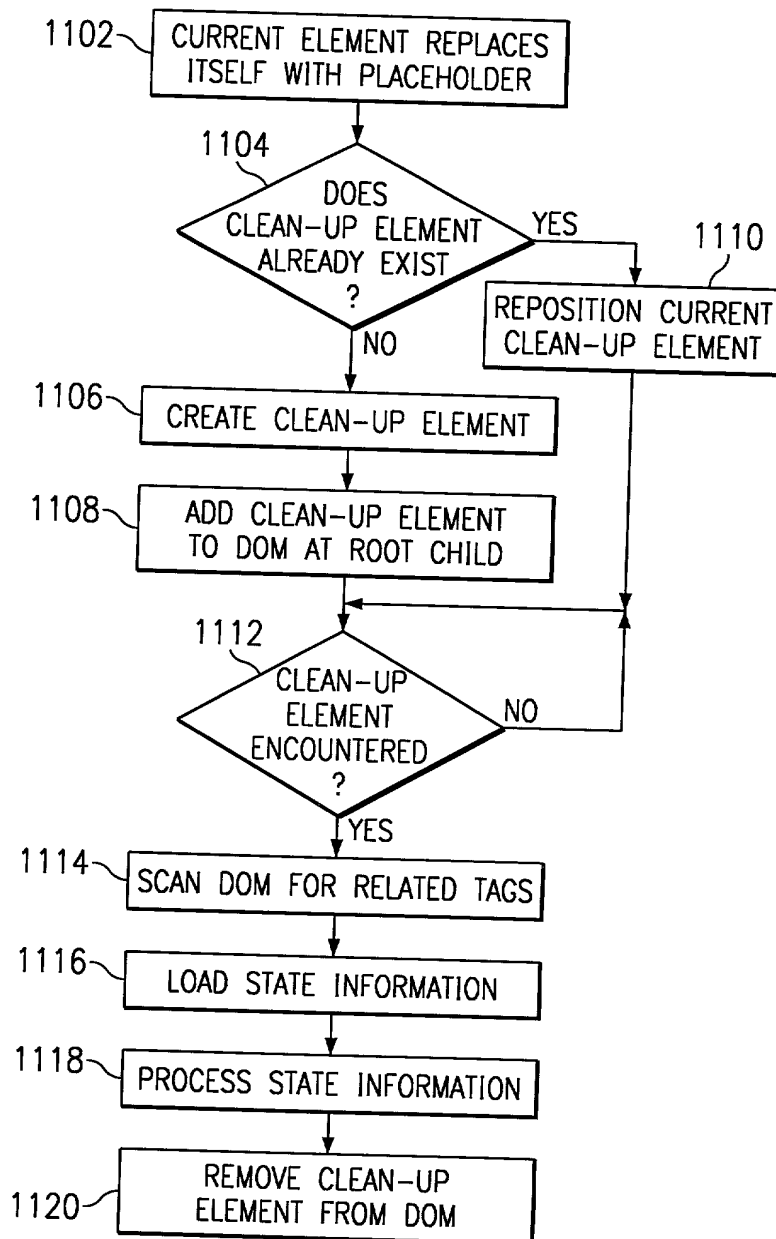


FIG. 11

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A METHOD FOR DEVELOPING A CUSTOM TAGBEAN

the specification of which (check one):

- ☒ is attached hereto.
- ☐ was filed on _____;
as Application Serial No. _____
and which was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Priority Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year)	___ Yes	___ No
-------------------	--------------------	---------------------------	---------	--------

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial #)

(Filing Date)

(Status)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John W. Henderson, Jr., Reg. No. 26,907; James H. Barksdale, Jr., Reg. No. 24,091; Thomas E. Tyson, Reg. No. 28,543; Robert M. Carwell, Reg. No. 28,499; Jeffrey S. LaBaw, Reg. No. 31,633; Douglas H. Lefevre, Reg. No. 26,193; Casimer K. Salys, Reg. No. 28,900; David A. Mims, Jr., Reg. No. 32,708; Anthony V. England, Reg. No. 35,129; Volel Emile, Reg. No. 39,969; Leslie A. Van Leeuwen, Reg. No. 42,196; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; Marilyn S. Dawkins, Reg. No. 31,140; Mark E. McBurney, Reg. No. 33,114; David H. Judson, Reg. No. 30,467, and Douglas A. Sorensen, Reg. No. 31,570.

Send correspondence to: David H. Judson, Hughes & Luce, L.L.P., 1717 Main Street, Suite 2800, Dallas, Texas 75201 and direct all telephone calls to Mr. Judson at 214/9395672.

FULL NAME OF FIRST
INVENTOR:
INVENTOR'S SIGNATURE:

Christopher Shane Claussen


9/27/1999

DATE:

RESIDENCE:


3808 Latimer Drive
Austin, Texas 78732

CITIZENSHIP:

US

FULL NAME OF SECOND
INVENTOR:
INVENTOR'S SIGNATURE:

Matthew Dale McClain


9/30/1999

DATE:

RESIDENCE:

11701 N. Metric Blvd., #1622
Austin, Texas 78758

CITIZENSHIP:

US